


AURALIS

THE ART OF SILENCE



back side: 4/4mm, plywood birch

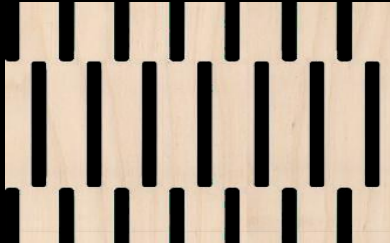


4/4 mm, plywood birch 10 mm


Incision type: **LINAR**

With LINAR, the regular incisions are continuous on the surface. This creates a smooth and homogeneous cut pattern. The front and back sides are clearly distinguishable. The applications are mainly in the field of ceiling and wall applications for optical and acoustical room design.

The incisions are regularly and continuous on the surface. As a visual effect, this arrangement creates a calm and homogeneous surface. Front and reverse side look clearly different. Application areas are mainly ceiling- and wall panels.

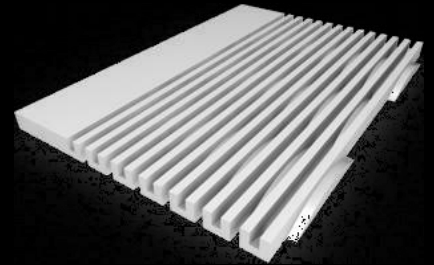

Technical Data

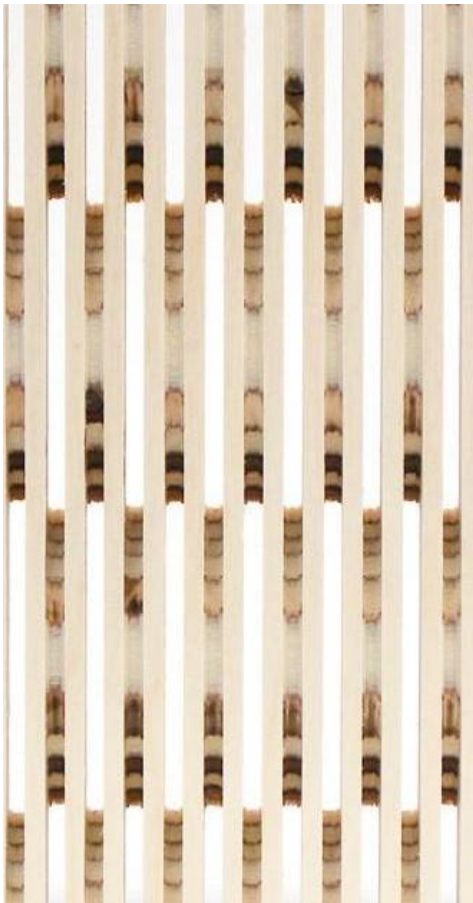

front side: 4/4 mm, plywood birch

Material	MDF, Plywood, 3-Layer Board
Standard incision	4 mm Nut / 4 mm Steg Cut / Bar
Min. bendign radius	Ca. 120 mm
Open area:	20% - 40%
Standard dimensions	2400 mm x 1200 mm x 6-12mm
Surface	Verneer, spray paint, coat, oil